


Technical data sheet

Vario quick connector 200 kA

Item number: 5311595

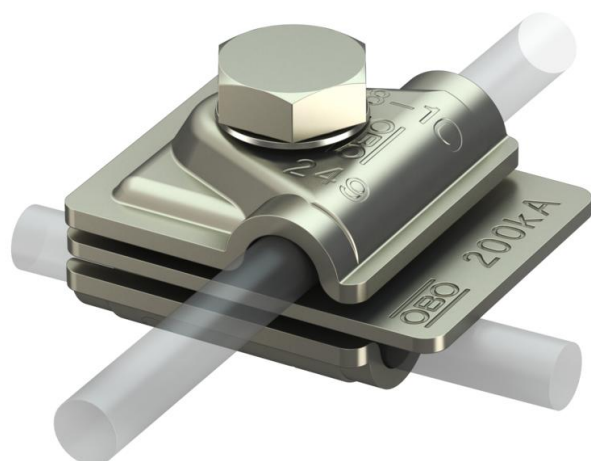

- For T, intersection and parallel connections
- Quick mounting using an M10 x 30 bolt, made from rustproof stainless steel
- Meets the requirements of VDE 0185-305 (IEC 62305)
- Tested according to VDE 0185-561-1 (IEC/EN 62561-1) with 200 kA
- For use in lightning protection class I with the isCon® Premium conductor



A2 Stainless steel

Master data

| | |
|---------------------|-----------------------|
| Item number | 5311595 |
| Type | 249 8-10 V2A 200 |
| Description 1 | Quick connector 200kA |
| Description 2 | vario |
| Manufacturer | OBO |
| Dimension | 50x40mm |
| Material | Stainless steel |
| Smallest sales unit | 10 |
| Unit of quantity | Piece |
| Weight | 12.374 kg |
| Weight unit | kg/100 pc. |

Technical data sheet

Vario quick connector 200 kA

Item number: 5311595



Technical data

| | |
|---|-----------------------------------|
| Type of fastening screw | Hexagonal bolt |
| Type of connector | Multipurpose connection clamp |
| Lightning current carrying capacity | H2/200 kA |
| Suitable for connection | Round conductor Rd 8–10 / Rd 8–10 |
| Fit | Rd 8-10 mm |
| Round conductor diameter, conductor 1, max. | 10 mm |
| Round conductor diameter, conductor 1, min. | 8 mm |
| Round conductor diameter, conductor 2, max. | 10 mm |
| Round conductor diameter, conductor 2, min. | 8 mm |
| Intermediate plate | no |