


# Technical data sheet

## Cover for add-on tee, BKRS



Item number: 6049429

Unperforated cover with chequer plate for add-on tee fitting for BKRS walkable cable tray system. Suitable for mounting in indoor areas. To protect the cables against damage and soiling. With pre-marked break-out openings for fastening with turn buckles. Turn buckles not contained in scope of supply.

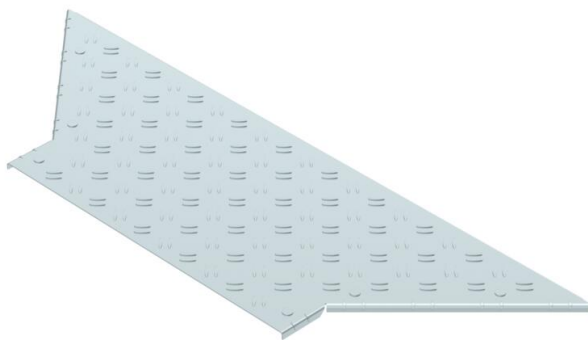

- St** Steel
- FS** Strip galvanized

### Master data


|                     |                                |
|---------------------|--------------------------------|
| Item number         | 6049429                        |
| Description 1       | Cover for add-on tee           |
| Description 2       | walk-on, for side height 100mm |
| Manufacturer        | OBO                            |
| Dimension           | B600mm                         |
| Material            | Steel                          |
| Surface             | Strip galvanized               |
| Surface standard    | DIN EN 10346                   |
| Smallest sales unit | 1                              |
| Unit of quantity    | Piece                          |
| Weight              | 426.6 kg                       |
| Weight unit         | kg/100 pc.                     |

# Technical data sheet

## Cover for add-on tee, BKRS

Item number: 6049429

### Dimensions



|                 |          |
|-----------------|----------|
| Length          | 286 mm   |
| Width           | 1,146 mm |
| Height          | 16 mm    |
| Plate thickness | 2 mm     |
| Dimension B     | 600 mm   |

### Technical data

|                                   |        |
|-----------------------------------|--------|
| Number of turn buckles            | 0 St.  |
| Fastening type                    | On top |
| Suitable for cable ladder         | no     |
| Suitable for cable tray           | yes    |
| Material thickness                | 2 mm   |
| Rustproof steel, pickled          | no     |
| Permitted temperature range, max. | 120 °C |
| Permitted temperature range, min. | -20 °C |
| Wide-span version                 | no     |