


F/

: 5093275




- - 2 x 2.5 kA10/350 µs
 - m = w =
 -
 - F
 -
 - OBO M25
- DVB-T(2)



	5093275
	DS-F M/W
1	
2	
	OBO
	130V
	1
	9 kg
	kg/100

F/

: 5093275

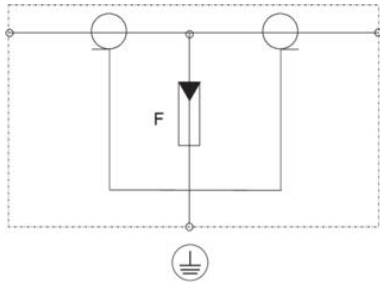

	1
(Insertion loss)	≤0,9 dB
(10/350)	2
(8/20)	10 kA
	3400 MHz
AC	130
DC	185
	1 kA
	>1 GΩ
-	<10 pF
-	<20 pF
Kategorie	Typ 1+2 / D1+C2
LPZ	0→2
	/
AC	3.5
DC	5 A
	IEC 61643-21
	≥14
	IP40
	<800 V
-	<800 V
-	<800 V
SPD IEC 61643-21	Class I+II / D1+C2
	F
-	C2: 10 kV / 5 kA (8/20μs)
-	C2: 10 kV / 5 kA (8/20μs)
	80 °C
	-40 °C
	75 Ω
	COAX