

N/

: 5093996




- 2 x 2.5 kA10/350  $\mu$ s
- m/w
- 
- 
- N
- OBO M25



	5093996
	DS-N M/W
1	
2	
	OBO
	130V
	1
	12.2 kg
	kg/100

N/

: 5093996

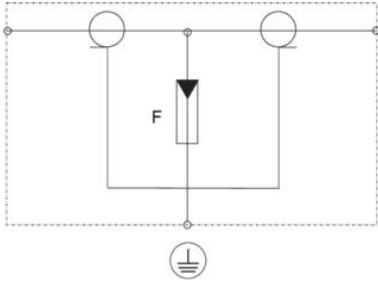

(Insertion loss)	1 ≤0,62 dB
(10/350) (8/20)	5 10 kA 3000 MHz
AC	130
DC	185
	2.5 kA
	>1 GΩ
-	<10 pF
-	<20 pF
Kategorie	Typ 1+2 / D1+C2
LPZ	0→2
	/
AC	7
DC	10 A
	IEC 61643-21
	≥14
	IP40
	<800 V
-	<800 V
-	<800 V
SPD IEC 61643-21	Class I+II / D1+C2
	N
-	C2: 10 kV / 5 kA (8/20μs)
-	C2: 10 kV / 5 kA (8/20μs)
	80 °C
	-40 °C
	50 Ω
	COAX