


Technical data sheet

GESRM2 service outlet with floor covering protection frame
for UZD/UDL, nickel-plated
Item number: 7405688

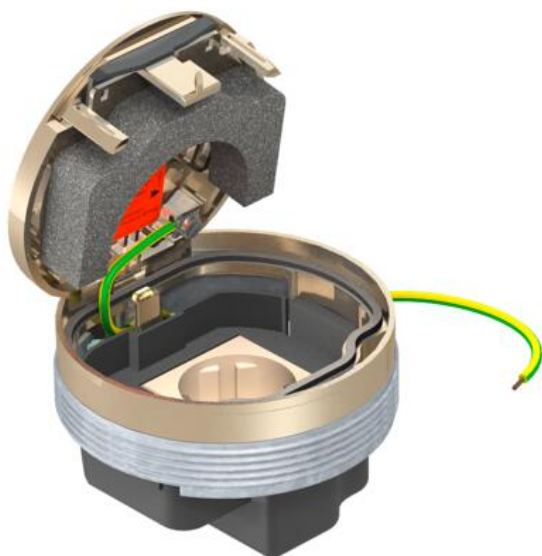

Round flush-mount unit with flushfloor contact frame for direct installation in the connection socket UDL2-120 for indoor use. In conjunction with a blanking lid DUG.RM2, the flush-mount unit can also be installed in an underfloor draw and junction box of nominal size 190, 250 or 350. Flush-mount unit with a single power socket with a 33° insertion direction. At the side, next to the socket, there is space for an optional to two connection sockets for data technology applications. When closed, the flush-mount unit can be wet-cleaned. The minimum installation depth is 70 mm.

Nickel-plated surface.
Information for mounting without floor covering: The service outlet protrudes over the adjusting ring of the mounting lid or the UDL by approx. 5 mm, depending on the system.



- Zn** Die-cast zinc
- N** Nickel-plated

Master data



Item number	7405688
Description 1	Service outlet
Description 2	with contact frame, Ni-plated
Manufacturer	OBO
Material	Die-cast zinc
Surface	Nickel-plated
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	67.965 kg
Weight unit	kg/100 pc.

Technical data sheet

GESRM2 service outlet with floor covering protection frame
for UZD/UDL, nickel-plated
Item number: 7405688



Dimensions

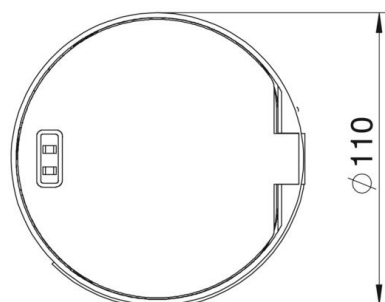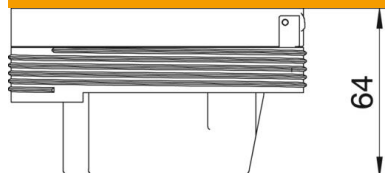

Technical data

Version for	Round
Floor covering protection frame	no
Suitable for raised floor installation	no
Suitable for cavity floor installation	no
Suitable for wet care	yes
Suitable for underfloor ducts	yes
With floor covering recess	no