

# Technical data sheet

## Multi-Quick clip

Item number: 2153130



Flush-mounted clip to accept metric and PG pipes and Quick Pipe electrical installation pipes. Flexible clamping range of several millimetres. Universal fastening options on walls and ceilings and usable in a profile rail, both in indoor and protected outdoor areas. Toolless pipe mounting. Can also be arranged with OBO Quick clip or starQuick clip.



**PA** Polyamide

### Master data

Item number	2153130
Type	M-Quick 25-28LGR
Description 1	Multi-Quick clip
Manufacturer	OBO
Dimension	25-28,5mm
Colour	Light grey; RAL 7035
Material	Polyamide
Smallest sales unit	50
Unit of quantity	Piece
Weight	1.17 kg
Weight unit	kg/100 pc.


# Technical data sheet

## Multi-Quick clip

Item number: 2153130



### Dimensions

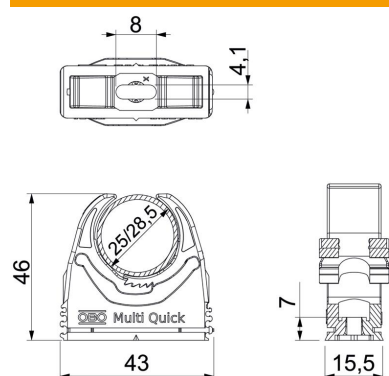

Dimension A	43 mm
Dimension B	15.5 mm
Dimension E	8 mm
Dimension F	4.1 mm
Dimension h	7 mm
Dimension H	46 mm

### Technical data

Expandable	yes
Number of cables/pipes	1
Pull-out value	60 N
Fastening type	Screw hole
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C
Closed	no
Halogen-free	yes
With inlay	no
Snap system	yes
Quick clip installation	Durchgangsloch_auf_M6_Gewinde_aufschraubbar
Clamping range D, max.	28.5 mm
Clamping range D, min.	25 mm
UV-resistant	no