

1 NPE

: 5096863



TN-S TT N-PE IEC 61643Type 1B IEC 61312-1 DIN VDE 0185-305 4 0 1 (LPZ) N PE


- VDE-AR-N 4100
- 125 kA (10/350 μ s)
-
- <2.5kV
-

VDE-AR-N 4100

5 m




	5096863
	MC 125-B NPE
1	
2	NPE
	OBO
	255V
	1
	52 kg
	kg/100

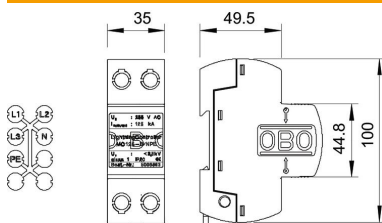

	100 mm
	35 mm
	69 mm

1 NPE

: 5096863

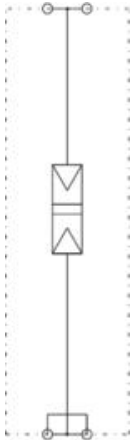

(8/20 μ s) □	125 kA
	<100 ns
	1255V
	N/PE
(TE17.5mm)	2
	85 °C
	-40 °C
(10/350 μ s)	50 kA
(10/350) □	125 kA
[N-PE]	0.1 kA
AC	255
	0 kA
	0 kA
/	50 mm ²
/	10 mm ²
LPZ	0→1
	35mm
(8/20 μ s)	50 kA
AC (50 / 60 Hz)	230 V
1	
	IP20
	≤2,5
SPD EN 61643-11	1
SPD IEC 61643-1	I