

Technical data sheet

Fine protection for 9-pole RS485 interface

Item number: 5080061



Data cable protection device for serial interfaces

- Various connection technologies available
- Low voltage protection level


Application: PLC, alarm systems, controllers



Master data

Item number	5080061
Description 1	Data line protection device
Description 2	for V24 interface D-SUB 9
Manufacturer	OBO
Dimension	6V
Smallest sales unit	1
Unit of quantity	Piece
Weight	2.951 kg
Weight unit	kg/100 pc.

Dimensions

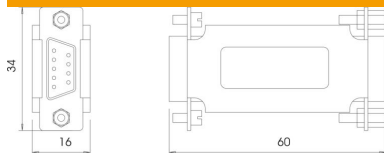

Length	60 mm
Width	16 mm
Height	34 mm


Technical data sheet

Fine protection for 9-pole RS485 interface

Item number: 5080061



Technical data

	Arrestor monitoring	no
	Response time	<10 ns
	Number of poles	9
	Version for	SUB-D-9; V11 RS485
	Explosion-tested version	no
	Telecommunications contact	no
	Maximum continuous voltage AC	5.2
	Maximum continuous voltage DC	8
	Kategorie	Type 3 / C1
	Lightning protection zone LPZ	2→3
	Mounting type	Connector/cable adapter
	Nominal voltage	6 V
	Testing standard	IEC 61643-21
	Shielding connection available	yes
	Screening	Direct
	Protection rating	IP40
	Protection level wire-wire	<100 V
	Protection level, wire-wire at 1 kV/ μ s (C3)	<10 V
	Protection level wire-earth	<100 V
	Protection level, wire-earth at 1 kV/ μ s (C3)	<10
SPD to IEC 61643-21	Class III / C1	
Plug-in system	D-Sub 9-pin	
Impulse durability wire-wire	0,75 kA (8/20 μ s)	
Impulse durability wire-earth	0,75 kA (8/20 μ s)	
Permitted temperature range, max.	80 °C	
Permitted temperature range, min.	-40 °C	