

4 280 V

: 5094627



2


- VDE 0100-443 (IEC 60364-4-44)
- 40 kA (8/20us)
-
-

LPZ 1 2

*=




1	5094627
2	V20
	4
	OBO
	280V
	1
	43 kg
	kg/100

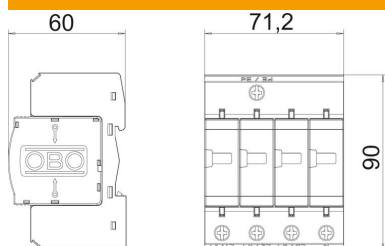

4 280 V

: 5094627



	(8/20 μ s) □	80 kA
		<25 ns
		4
		4
	(TE17.5mm)	4
		80 °C
		-40 °C
	AC	280
		25 mm ²
	/	35 mm ²
	/	2.5 mm ²
	LPZ	1→2
		125
		125 A
	(8/20 μ s)	40 kA
		35mm
	(8/20 μ s)	20 kA
	AC (50 / 60 Hz)	230 V
		TN
	2	
	IP20	
	≤1,3	
SPD EN 61643-11	2	
SPD IEC 61643-1	II	