


# Technical data sheet

3-wire connection cable, halogen-free, cross-section 2.5 mm<sup>2</sup>, 3 m length, black  
Item number: 6108734



Connection cable 3 x 2.5 mm<sup>2</sup> in the version socket-connector, type WINSTA® MIDI.

Hose pipe: H05Z1Z1-F 3 x 2.5 mm<sup>2</sup>  
Suitable for connection of ready-for-connection universal supports Connect UTC to an energy distributor.

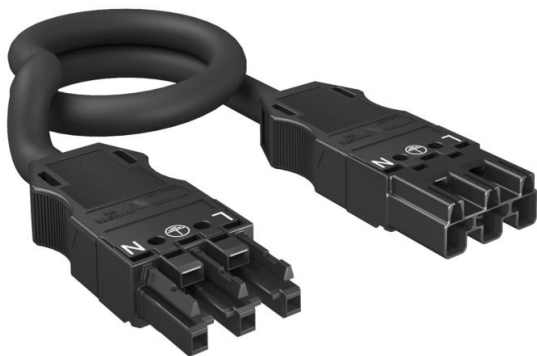

PA Polyamide

## Master data

Item number	6108734
Type	VL-WIN 3P2.5H3SW
Description 1	Connection cable
Description 2	3x2,5mm <sup>2</sup> , WINSTA
Manufacturer	OBO
Dimension	3000x27x15
Colour	Black
Material	Polyamide
Smallest sales unit	1
Unit of quantity	Piece
Weight	46.2 kg
Weight unit	kg/100 pc.

## Technical data

Number of poles	3
Type of terminated cable	Connection cable
Type of locking	Separate
Version, page 1	socket
Version, page 2	Connector
Rated surge voltage	4
Fire load	2.04

# Technical data sheet

3-wire connection cable, halogen-free, cross-section 2.5 mm<sup>2</sup>, 3 m length, black  
Item number: 6108734



## Technical data

Colour of the coding/contact insert	Black
Halogen-free	yes
Cable type	H05Z1Z1-F
Cable length	3000 mm
Jacket colour	Black
Nominal voltage	250 V
Nominal current	20 A
Pin labelling	L, N, PE
Cross-section	1.5 mm <sup>2</sup>
Protection rating	IP20
Degree of soiling	3