



LC 63

Block diagram / Blockschaltbild

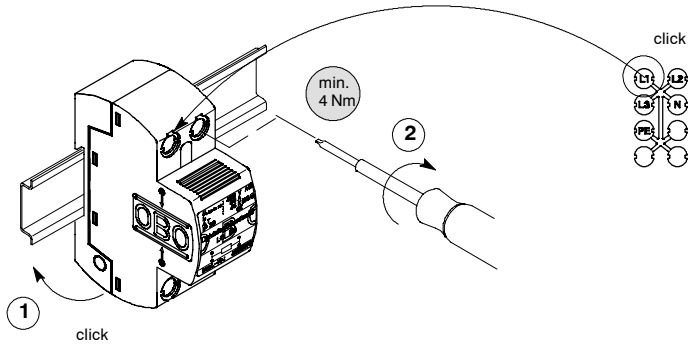




Technical Data / Technische Daten

Typ	LC 63
U_N	< 500 V / 50-60 Hz
I_L	63 A
L_N	5 μ H
R_{CU}	1 m Ω
ΔT	45 K (63 A)
IP-Code	63 A gL
v °C	- 40 °C - + 85 °C
IP-Code	20
Anschlussquerschnitt starr / flexibel /mehrdrahrig Anzugsmoment (M_A) mindestens 4 Nm	10–50 / 10–25 / 10-35 mm ² AWG 8-2


TN-C / TN-C-S

TN-S


TT

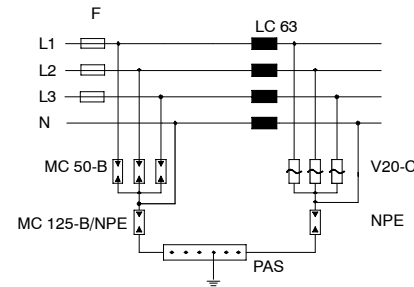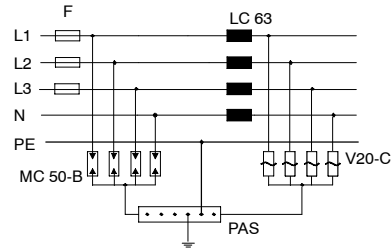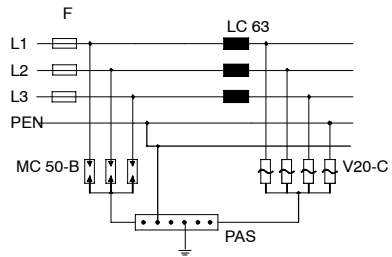

$F_{max.}$ = 63 A

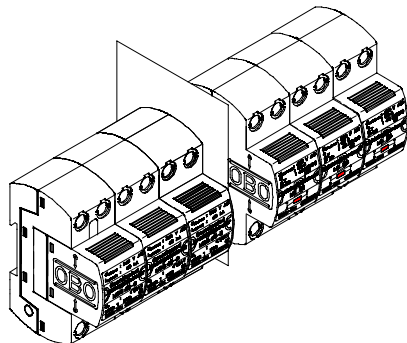

MC 50-B/VE
MC 125-B/NPE



Head Office OBO BETTERMANN GmbH & Co.

Postfach 1120 · 58694 Menden, Germany
Hungser Ring 52 · D-58710 Menden
Tel. +49 (0)2373-89-0 Fax +49 (0)2373-89-238
E-Mail: info@obo.de · www.obo-bettermann.com

Technical Hotline

Telefon +49 (0)2373/89-1500
Telefax +49 (0)2373/89-1550
E-Mail hotline@obo.de