


# Technical data sheet

## Cable tray EKS 60 FT

Item number: 6056776

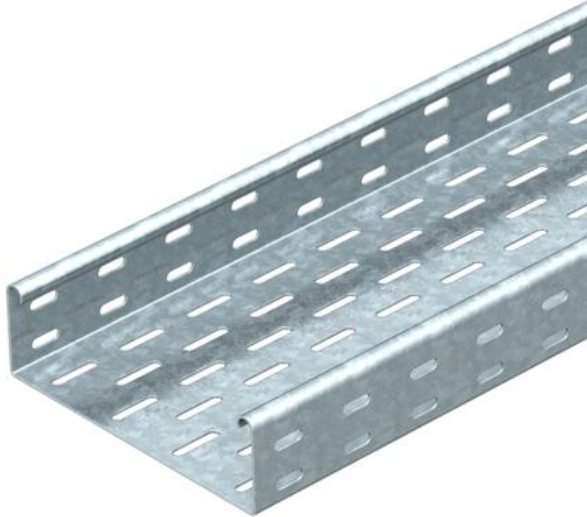

EKS 60 = Extra-heavy cable tray system with 60 mm side height.  
Straight connectors should be ordered separately for all the versions.  
Magnetic shield insulation without cover 20 dB, with cover 50 dB.



- St** Steel
- FT** Hot-dip galvanised

### Master data

|                     |                    |
|---------------------|--------------------|
| Item number         | 6056776            |
| Type                | EKS 610 FT         |
| Description 1       | Cable tray EKS     |
| Description 2       | perforated         |
| Manufacturer        | OBO                |
| Dimension           | 60x100x3000        |
| Material            | Steel              |
| Surface             | Hot-dip galvanised |
| Surface standard    | DIN EN ISO 1461    |
| Smallest sales unit | 3                  |
| Unit of quantity    | Metre              |
| Weight              | 364 kg             |
| Weight unit         | kg/100 m           |


# Technical data sheet

## Cable tray EKS 60 FT

Item number: 6056776



### Dimensions

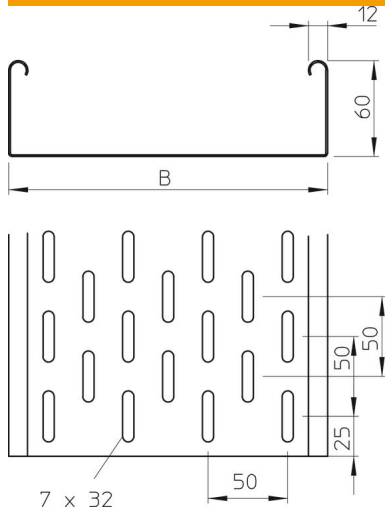

|                 |          |
|-----------------|----------|
| Dimension       | 60 x 100 |
| Length          | 3,000 mm |
| Width           | 100 mm   |
| Width           | 4 in     |
| Height          | 60 mm    |
| Height          | 2 in     |
| Plate thickness | 0.1 in   |
| Plate thickness | 2 mm     |
| Dimension B     | 100 mm   |

### Technical data

|   |                      |
|---|----------------------|
| Connector version                       | Without connectors   |
| Mounting system fastening type          | Floor Ceiling Wall   |
| Walkable                                | no                   |
| Maintain electrical functions           | no                   |
| With cover                              | no                   |
| Mounting perforation in base            | yes                  |
| NATO hole pattern                       | no                   |
| Usable cross-section                    | 58 cm <sup>2</sup>   |
| Usable cross-section                    | 5800 mm <sup>2</sup> |
| Rustproof steel, pickled                | no                   |
| Side perforation                        | yes                  |
| Wide-span version                       | no                   |
| Load test type according to IEC 61537   | Type II              |
| Type of connector, cable support system | Screwed              |

# Technical data sheet


## Cable tray EKS 60 FT

Item number: 6056776



### Loads

|                                   |           |
|-----------------------------------|-----------|
| Insertable support spacings, min. | 1.5 m     |
| Insertable support spacings, max. | 3 m       |
| Support spacing 1.5 m             | 3.3 kN/m  |
| Support spacing 2.0 m             | 2.2 kN/m  |
| Support spacing 2.5 m             | 1.6 kN/m  |
| Support spacing 3.0 m             | 0.95 kN/m |



### Load diagram, cable tray, type EKS 60

- 1 Permitted cable tray/ladder load in kN/m without man load
- 2 Support width in m
- 3 Rail bend in mm at permitted kN/m
- 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width