

Technical data sheet

UVS energy distributor with plug connection, normal and special circuit

Item number: 6107990



Input: 2x three-phase circuit using a self-locking plug connector, 5-pin, type WINSTA MIDI (connector part).

Output: 12 self-locking plug connectors, 3-pin, in white (6x) and black (3x), 25 A, type WINSTA MIDI (socket part: 2 x L1, 2 x L2, 2 x L3 for each rotary current circuit).

Internal wiring: PVC non-sheathed cable H07V-U2.5.

Input: 2x three-phase circuit using self-locking plug connectors, 5-pin, type WINSTA® MIDI (connector part).

Output: 12 self-locking plug connectors, 3-pin, in white (6x) and black (3x), 25 A, type WINSTA® MIDI (socket part: 2x L1, 2x L2, 2x L3 for each rotary current circuit).

Internal wiring: PVC non-sheathed cable H07V-U2.5.



St Steel

Master data

Item number	6107990
Type	UVS-WIN 6S6W
Description 1	Underfloor distributor
Description 2	with WINSTA, 1I 12O
Manufacturer	OBO
Dimension	300x163x46
Material	Steel
Smallest sales unit	1
Unit of quantity	Piece
Weight	137.046 kg
Weight unit	kg/100 pc.


Technical data sheet

UVS energy distributor with plug connection, normal and special circuit

Item number: 6107990



Dimensions

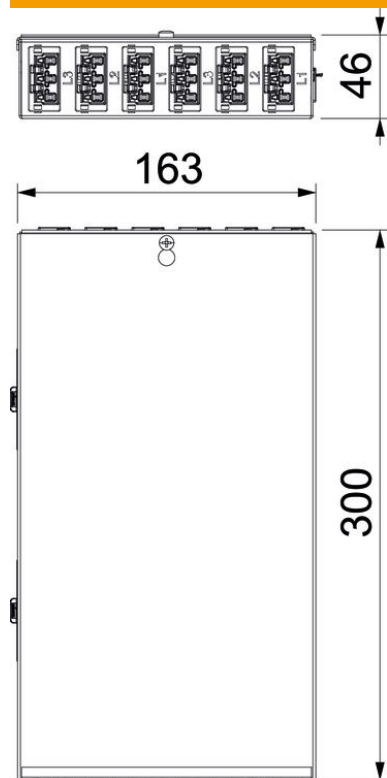

Length	196 mm
Width	149 mm
Height	46 mm

Technical data

Connection type	Plug-in system
No. of outlets	6
Number of input circuits	2
Input	5-pole
Colour of the plug connector system	Black/white
Suitable for through wiring	no
Cross-section of the connection cable	4 mm ²
Plug connector system, system-specific	yes